


AT7200R AirTite R-Series Single Speed:

Torque Range	2430 - 7230 ft-lb	Precise and Accurate - +/-5%
	3300 - 9800 nm	
Square Drive (B):	1-1/2 in	Filter/Regulator/Lubricator Assembly
D1**	3.58 in	Pressure to Torque Chart
	91 mm	
D2	6.81 in	360 Degree Articulating Motor
	173 mm	
D3	6.81 in	15 ft. hose assy
	173 mm	
Height:	14.57 in	Operation / Maintenance Manual
	370 mm	
Free Speed (rpm)	1	QUIET - 66-78 dB(A)
Weight (without support)	55.12 lb	1/2% Accurate Pressure Gauge
	25 kg	

(AirTite R-Series Accessories Professional Pictures)

ACCESORIES	
ARA-24-91-DW	Deep Reaction Arm
ARA-24-91-CN	Crab-Nut Reaction Arm
ARA-24-91-ML	Mill Liner/Extended Reaction Arm
SRA-24-91	Straight Reaction Arm
PSR-24-91	Splined Reaction Ring
SR-91	Sq. Dr. Extension 13"
ARA-24-91-DW	Safety Ring

**AT7200R FLOW CHART
AIRTITE PNEUMATIC TORQUE WRENCH**

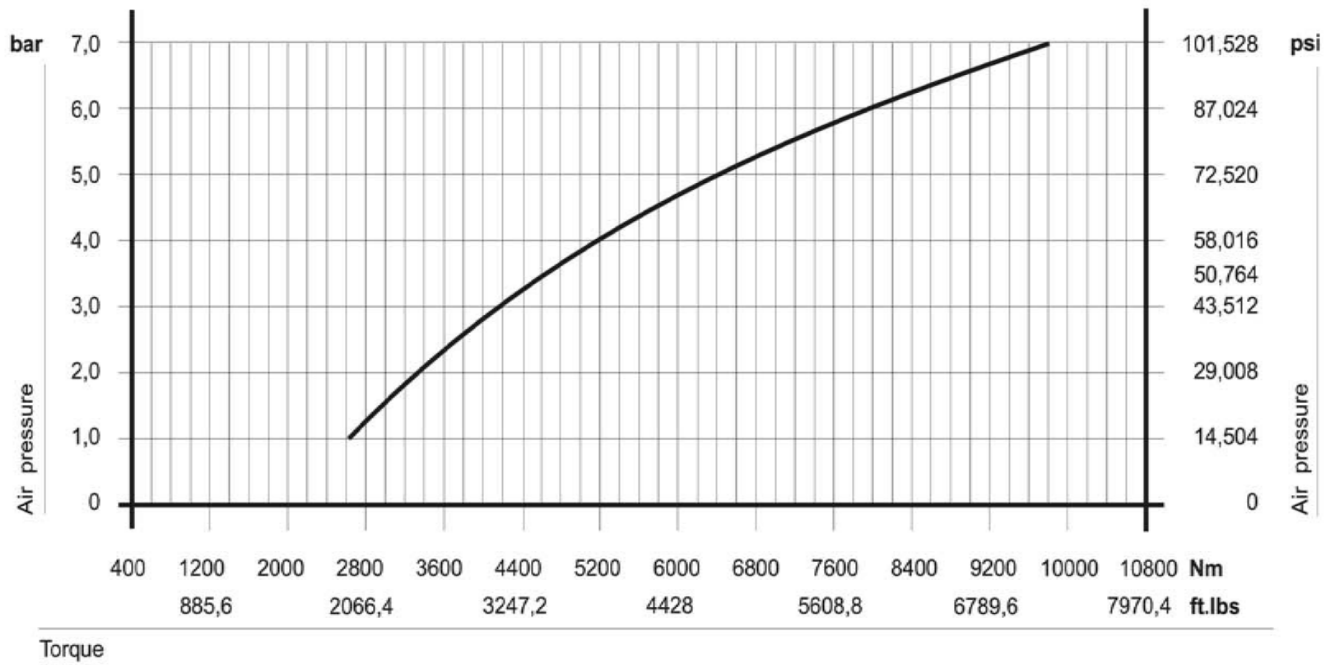

All curves are approximate values. Unstable compressed air values can cause derivations.

Torque Table		
	NM	Ft Lbs
bar	max	max
2	3330	2458
3	4215	3109
4	5330	3932
5	6530	4816
6	8000	5998
7	9795	7224

**Operating pressure on the machine.
Air consumption: 21 – 32 cfm.**